

ALUMINUM DENT PULLING SYSTEM AL-5



The AL-5 has proved to be the most versatile Capacitor Discharge unit on the market since it was introduced in 2014. Versatile and Easy to Use, the AL-5 speeds up all types of aluminum repair.


Pro Spot AL-5 Capacitor Discharge Stud Welder is designed for aluminum dent pulling but can also be used with steel studs for welding to UHSS panels with no or very little heat applied to the panels. The welder is very easy to use and is controlled by one knob to adjust duration of weld time. The welder auto detects the line voltage between 110 VAC – 240 VAC.



Description



Description

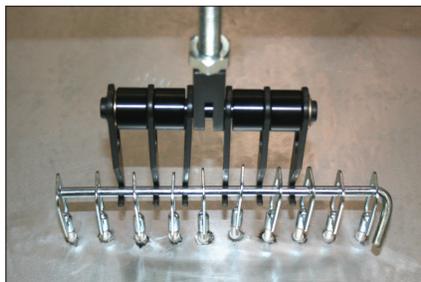

Description

Pull Bar Dent Removal System

Designed for both aluminum & steel dent pulling. Our new Pull Bar features a 4 & 6 Jaw clamp, and adjustable foot swivel pads for mounting both vertically & horizontally. The dent pull bar makes dent pulling extremely easy, quick & accurate. The pull bar can also adapt to the Pro Pull system for isolated dent pulling.



PRO SPOT

QUALITY WELDING SYSTEMS

ACCESSORIES




PRO-ALHMR
3 pc. Aluminum
Hammer Set
(optional)



50-0580
Stainless Steel
Brushes (optional)



89-1509
Cool Gel Heat
Barrier Spray (optional)

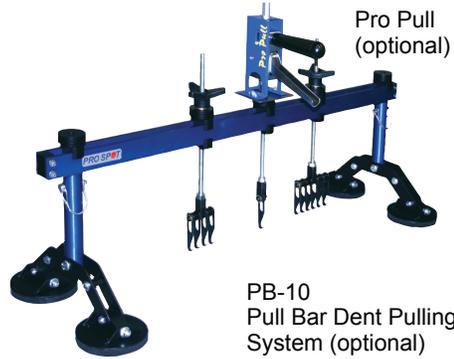

Pro Pull
(optional)

PB-10
Pull Bar Dent Pulling
System (optional)



PR0-66
Pro Pull Dent
Puller (optional)
shown with optional SA-0026
Hook Adapter



85-3088
Air Grinder
(optional)



85-0421
Infrared Laser
Thermometer
(optional)




90-0176
Pull Washers
12 ea.



50-1320
M4 Studs
50 ea.



PR0-66 Pro Pull shown with optional SA-0028
Single Pull System



Technical Specifications:

Input Voltage: 110 - 220V (Auto Detect)
Amperage: 5 - 12A
Cord Length: 10'
Stud Diameters: Standard 4mm x 16mm
(M5, M6 M8 optional)
Dimensions: 13.7" L x 7.5" W x 10.8" H
Weight: 37 lb (17 kg)



EMAIL: info@prospot.com

Pro Spot International, Inc. U.S.A. 5932 Sea Otter Place Carlsbad, CA 92010

www.PROSPOT.com
877-PRO-SPOT