

THE PROFESSIONAL DENT REPAIR SOLUTION

Introducing the updated MWS-AL-COMPLETE station, the professional solution for your dent repair needs. With new and efficient DA-3 Drawn Arc Welder and a variety of pulling tools on one mobile station, you can repair any dent anywhere in the shop.

The MWS-AL-COMPLETE station also offers a wide range of dent pulling accessories and tools. These added tools give technicians the ability to pull any dent on various materials.


The station provides plenty of storage space with lockable drawers and toll hooks and customization opportunities.



MULTIPLE TOOLS STORAGE SOLUTIONS ON ALL SIDES OF THE STATION



SECURE STORAGE WITH LOCKABLE DRAWERS

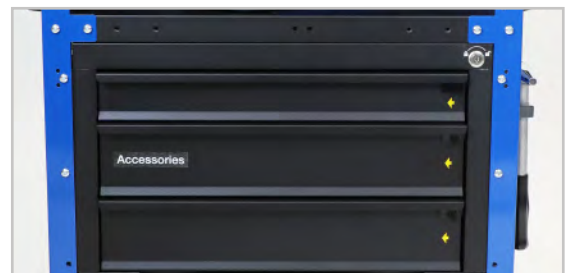


APPLY KEYS AND STUDS WITH DRAWN ARC WELDING



The Pro Spot DA-3 Synergic Drawn Arc welder easily applies pulling keys and threaded studs so that various tools can be used to pull dents from steel and aluminum panels. With specific programs for both steel and aluminum, the DA-3 features:

- Different functions for a variety of repair procedures
- Color graphics screen for easy and intuitive set up
- Customizable and storable weld programs
- SD card memory to update and add programs
- Extremely lightweight

The DA-3 has a wide range of configurations to best fit your shop's needs. It can be added to a weld cart or even a Mobile Weld or Dent Pulling station for additional functionality, mobility and storage.

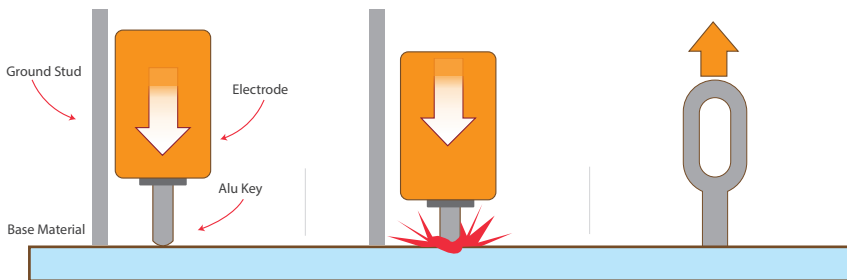

Aluminum Key is placed in the electrode fixture. Bring the Key in contact with the dent. Ground Stud should be in contact with the base material as well.


A controlled arc melts the end of the key and the base material. After the programmed time, the arc is stopped and the key plunges into the molten weld puddle. Pause a moment for the metal to solidify before withdrawing the electrode holder from the welded key.

Key is ready to pull dent. Repeat process with additional keys along the dented area. Keys are reusable.


TECHNICAL SPECIFICATIONS

Input Power:	200-230V 1ph. 20A
Current Range:	50-200A
Power:	300W Max
Dimensions:	14.17"x6.3"x10.8" (370x160x274mm)
Weight:	12.3lbs. (5,5kg)
Metals:	AlMg3 - AlMgSi - Steel, Stainless Steel, Galvanized Steel


SCREENS



Automatic Operation



Manual Operation



Saving Customized Programs



Polarity Indication

